

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 1 017 244 A1

(12)

## EUROPEAN PATENT APPLICATION

(43) Date of publication:  
05.07.2000 Bulletin 2000/27

(51) Int. Cl.<sup>7</sup>: H04Q 11/04

(21) Application number: 98830788.0

(22) Date of filing: 28.12.1998

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE  
Designated Extension States:  
AL LT LV MK RO SI

(71) Applicant: Italtel s.p.a.  
20154 Milano (IT)

(72) Inventors:  
• Profumo, Alberto  
20147 Milano (IT)

• Santacesaria Claudio  
20139 Milano (IT)  
• Baldo Paolo  
28065 Cerano (NO) (IT)  
• Lovino Luigi  
20134 Milano (IT)

(74) Representative: Giustini, Delio  
c/o Italtel S.p.A.,  
Cascina Castelletto  
20019 Settimo Milanese (MI) (IT)

(54) **Method and system to assign transmission bandwidth in both radio and pon ATM P-MP systems**

(57) A method and a system are described to assign bandwidth in a point-to-multipoint ATM transmission system, comprising a centralised unit or Master Station (MS) and a plurality of peripheral units (PSs), in particular to assign transmission bandwidth on the channel from PSs to MS, by assigning transmission abilitations in defined time slots sending messages called Grants on the channel from MS to PSs.

The system comprises means adapted to preallocate a certain portion of the total bandwidth in static way to various PSs on the basis of the information about active connections without considering queue status of the PSs.

According to the invention MS comprises additional means able to elaborate instantaneous bandwidth requirement information ("Requests") sent by PSs and able to allow distribution of bandwidth not assigned with previous static technique according to two additional modalities together defined dynamic bandwidth allocation mode and explicitly described in the following:

- first additional modality is defined guaranteed dynamical bandwidth and means are structured in a way to generate a rate of assignment of transmission abilitations (Grants) that is prefixed but is real time modifiable according to instantaneous bandwidth requirements notified by each PS, so that a minimum guaranteed bandwidth defined during connection setup phase is always assigned when requested with precise notification.
- second additional modality is called available

dynamic bandwidth and means are structured in a way that allow assignment of bandwidth which is not assigned by the previous techniques by sharing it in equal parts among all the PSs that signal to the MS the need to use the channel from PSs to MS to send traffic.

EP 1 017 244 A1

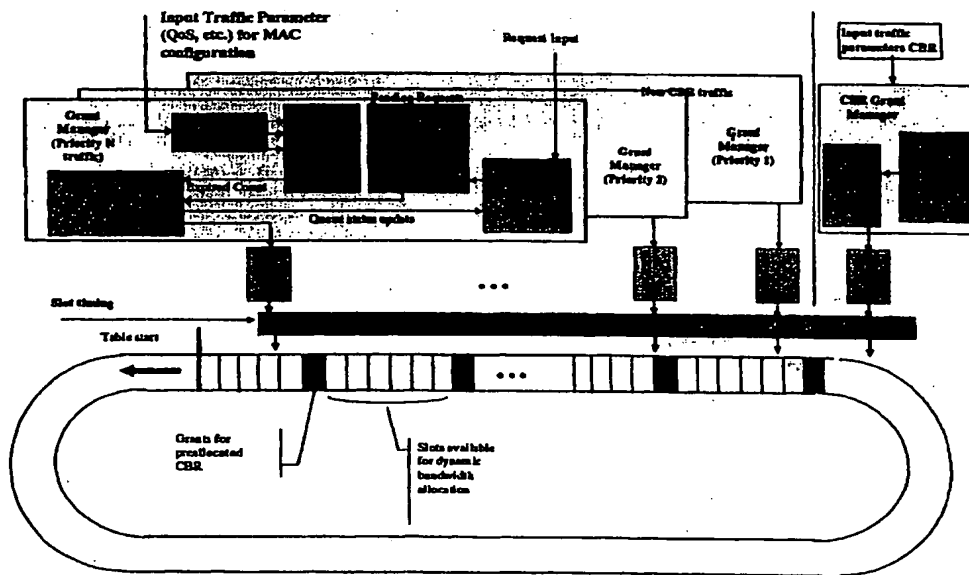


Fig. 3

## Description

### BACKGROUND AND FIELD OF THE INVENTION

[0001] The invention relates to the definition and the exploitation path of a Medium Access Control (MAC) protocol to be applied in wideband point-to-multipoint transmission systems, that rely on optical physical layer (Passive Optical Network) or radio physical layer and operate according to the time division multiple access schema and ATM transport format.

[0002] Among access techniques in telecommunication networks, point-to-multipoint on radio or physical channel are having a great market success due to their indubitable advantages in terms of flexibility and costs compared to point to point solutions.

[0003] As well known by skilled in the art, this kind of systems is characterised by the presence of a Master Station (MS) and a certain number of Peripheral Stations (PS): downstream channel (from MS to PS) is broadcast while upstream channel (from PS to MS) is used with time division multiple access (TDMA) under MS control.

[0004] To properly realise transmission from many PS to the single MS on a single channel, a point-to-multipoint system needs a solution to allow effective sharing of the single communication channel and to avoid that each PS transmission could interfere with others'.

[0005] The solution for physical mean sharing is generally based on time division multiple access, that is the single communication channel used for transmission from PSs to MS is divided into time slots defined on the basis of timing diffused on the broadcast downstream channel.

[0006] Each time slot is reserved to transmission from a single PS that is activated in that particular slot by a message, called 'grant', sent by the MS on the downstream channel.

[0007] MAC functionality, located in the MS, is in charge of generating these 'grant' messages in order to satisfy bandwidth requirements of PSs.

[0008] In an ATM system, moreover, MAC functionality has to be able to guarantee that bandwidth assigned to each PS allows to fulfil quality of service parameters of each connection belonging to different classes of traffic defined in the international specifications.

[0009] In specialised literature and patent specifications various TDMA solutions have been proposed; they can be divided into two categories:

- extremely specialised ones, based on physical channel properties and little reusable even in different versions of the same equipment; these solutions are often enough simple, still being very sensitive to round trip delay, channel capacity and error probability.

- flexible solutions, very complex in hardware but with indubitable advantages of total adaptivity.

[0010] We can quote some of the most interesting experiences about these techniques.

[0011] In the CEE financed project "RACE 2024 Broadband Access Facilities" an experimental system to access a passive optical network has been implemented. In this system the MS (optical line termination) manages upstream channel by the generation of 'grants' dedicated to single users connected to peripheral stations.

[0012] Complexity was high due to the exchange and treatment of queue status and the system was not able to optimise transportation of ATM connections carrying narrowband services like, for example, telephone calls.

[0013] A different approach, taking into account narrowband services, was based on a MAC protocol that allowed allocation of the bandwidth to services on a semi-permanent basis, but unfortunately treated in the same manner also variable traffic or wideband connections, like, for example, Internet access connections.

[0014] Technique described in the Italian patent 01286424, titled "Metodo di gestione dell'accesso ad una rete ottica passiva (PON) in un sistema PON di tipo TDMA", introduced major improvements in comparison with previous techniques allowing narrowband and broadband traffic treatment and, as far as broadband traffic is concerned, giving the possibility to allocate bandwidth in dynamic fashion.

[0015] These results have been achieved with some new concepts:

- Use of 'grants' addressing PS and not the user flux with the advantage of letting the PS choosing which user (connection) to serve each time that a grant is received.
- Narrowband and constant bandwidth broadband traffic treatment via a semi-permanent table.
- Variable bandwidth broadband traffic without maximum delay requirements is treated with an algorithm that takes into account the fullness level of queues in the PS to decide PS priority for 'grant' assignment.

### SCOPE AND SUMMARY OF THE INVENTION

[0016] Object of present invention is a MAC protocol and related realisation modalities, capable of not only serve in adequate manner connections related to narrowband and broadband services with required efficiency, but also to satisfy some traffic parameters of broadband services, differentiating thus, within broadband services, treatment of connections belonging to different traffic classes, but guaranteeing in the mean-time efficient use of all available transmission capacity or bandwidth in the channel from PSs to MS.

[0017] According to present invention, transmission bandwidth from PSs to MS is assigned by the MS to the PS, following two different modalities.

- static allocation (known technique)
- dynamic allocation

[0018] An important aspect of present invention is represented by the fact that dynamic allocation is made according to two different mechanisms:

- one mechanism for dynamic guaranteed bandwidth allocation guarantee that PS has always the possibility to be assigned, for certain connections, a certain amount of "minimum guaranteed bandwidth" defined during connection setup phase but allows PS to momentarily free a part of or all this "minimum guaranteed bandwidth", according to two different and concurrent mechanisms that can be separately used and are described below;
- a dynamic mechanism to partition bandwidth that remains available distributes this "available bandwidth" in equal parts among all PSs that have traffic to be transmitted, thus implementing a fairness model perfectly attending criteria specified by standardisation bodies.

[0019] As to previously described mechanism of guaranteed dynamical bandwidth allocation, PS can modulate assigned bandwidth according to two modalities: first modality which is on/off, is based on the sending by the PS of an aggregated information about queue status related to those queue which rely on the dynamical bandwidth allocation; this information, indicating whether traffic to be transmitted is present or not can be used by the centralised unit to momentarily inhibit bandwidth assignment to PS that doesn't have traffic waiting to be transmitted in connections with dynamical bandwidth allocation.

[0020] Second modality is, instead, based on the sending by the PS of a more detailed information about real bandwidth requirements for guaranteed bandwidth connections and allows centralised unit, on the basis of received information, to change instantaneous bandwidth assignment to that PS on the basis of instantaneous requirements, in order to guarantee efficient statistical multiplexing.

[0021] The present invention reaches therefore the target of over-performing known algorithms for bandwidth allocation in terms of efficiency, implementing a simple, robust and flexible MAC protocol for P-MP systems, capable of using in the best way the overhead to exchange information between PSs and MS, but capable in the meantime of guaranteeing support for different ATM classes of traffic, in conformance with existent rules.

[0022] The invention defines a MAC protocol suitable for P-MP radio or PON systems, operating on a sin-

gle communication channel for each transmission direction and based on ATM transport format and TDMA multiple access technique on the channel from PS to MS.

[0023] Protocol is able to treat in an optimal fashion bandwidth allocation for ATM classes like CBR and UBR and, through a totally new mechanism, even for different variable bandwidth traffic types with guaranteed minimum (like UBR+, VBR non real time, ABR, GFR, etc.).

[0024] MAC protocol proposed in the present invention offer instruments that allow MS to assign to each PS a bandwidth which is evaluated on a instant by instant basis on the basis of state information received by PSs, always guaranteeing respect of traffic parameters and, in particular, of minimum guaranteed bandwidth, defined in the connection setup phase and MS can eventually modulate assigned bandwidth on the basis of state information received by PSs.

[0025] According to method proposed in the invention, ATM layer is left the responsibility to guarantee other service parameters, like cell loss probability and delay constraints (that are not treated by the new MAC protocol).

[0026] The invention is clearly defined in independent claims 1 and 13. Additional useful characteristics of present invention which are believed to be novel are set forth with particularity in the appended claims.

#### BRIEF DESCRIPTION OF THE DRAWINGS

[0027] The invention, together with further objects and advantages thereof, may be understood with reference to the following description, taken in conjunction with the accompanying drawings, and in which:

Figure 1 is a reference scheme of a P-MP system, in the case of radio physical layer;

Figure 2 is a scheme that illustrates interfaces of MAC protocol processor in the MS;

Figure 3 is a scheme illustrating generic mechanism of grant generation to be used in the MAC protocol processor in the MS;

Figure 4 is a scheme that shows MAC protocol processor interfaces in the PS;

Figure 5 is a schematic picture of the selective retransmission scheme without traffic distortion;

Figure 6 is a scheme of grant generation mechanism with retransmission included for MS MAC Master Processor.

#### DESCRIPTION OF SOME EMBODIMENTS OF THE INVENTION

[0028] Reference scheme is shown in Figure 1.

[0029] Used acronyms are the following:

PS: Peripheral station  
MS: Master Station

[0030] Relevant entities are defined in the following way:

#### MAC Master Processor

[0031] Localised in the MS, it elaborates information received by PSs and generates messages (grant) to assign upstream transmission in each slot of the TDMA frame to selected PS.

#### MAC Slave processor

[0032] Localised in the PS, it provides correct transmission commands, choice of traffic to be transmitted in each slot on the basis of MAC information received and information or messages to be sent to MS.

#### MAC Protocol

[0033] MAC protocol uses messages that are sent in both directions to co-ordinate various functional entities (MS and PS): these messages and their interpretation are called MAC protocol. MAC protocol of current invention, belongs to category of protocols without collision, with centralised controller (MAC Master Processor) that is the only entity which can enable transmission of one or another PS.

[0034] Centralised control allows, in fact, avoiding that, after independent decisions, collisions take place that is more than one PS transmit at the same time with the consequence of lost information.

[0035] Main requirements of the system hereby described in terms of functionality and protocol as best defined in the following are:

1) flexibility of bandwidth allocation where flexibility is intended as:

- capability of varying, as a consequence of commands released by maintenance or control system, bandwidth allocation among various PS, without degrading already active traffic: it can be defined as capacity of bandwidth relocation.
- capability to dynamically assign, on the basis of information received by MS about various PS's queue status, each slot to one or another PS: this capability is usually called dynamic bandwidth allocation.

2) capability to support in proper way (QoS respect) various classes of traffic: CBR, UBR, VBR rt, VBR nrt, ABR, UBR+, GFR.

3) capability to operate independently of total channel capacity (from a minimum of 10 Mb/s to a maximum of 150 Mb/s).

4) capability to operate in every condition of distance between MS and PS up to a maximum dis-

tance of 20 km.

[0036] Bandwidth allocation, that is proper assignment of slot to each PS, can be done in a static way, which is independent of queue status in the PSs, or in a dynamic way which depends on the queue status in the PSs.

[0037] To satisfy QoS (Quality of Service) requirements of CBR traffic, static assignment is used; for other types of traffic dynamic assignment is preferred.

[0038] MAC functionality must, thus, be able to operate, even simultaneously, in both ways.

[0039] In the following, MAC messages, an essential part of the protocol are defined.

[0040] In MS → UP (downstream) direction the MAC Master Processor must send messages to indicate assignment of each upstream transmission slot. The message that carries assignment information is called *Grant*.

[0041] The number of these messages, in a certain time interval, must be equal to the number of upstream slots in the same interval. Duration of such interval depends on transport modality of the messages.

[0042] Grant carry the following information fields:

Type of slot to be transmitted by the PS (user traffic, operation and maintenance, minislot block);  
Identification number of the PS (or the PSs) to which slot is assigned (Connection ID or type of traffic is NOT carried).

[0043] If messages are grouped and sent in blocks of K, each block of K messages is transmitted before a period in which K upstream slots will be transmitted.

[0044] Precise choice of modality to carry Grants in downstream frame is not essential to protocol functionality.

[0045] Grant is protected with an error correcting code, because a grant which isn't received or is erroneously receive can cause collisions or wasted slots with the effects of bandwidth waste and potentially an excessive Cell Delay Variation (CDV) fro CBR traffic.

[0046] In the upstream direction, each PS sends to the MS indications about (instantaneous) queue status and instantaneous bandwidth need for dynamic bandwidth allocation.

[0047] This message is called "Request".

[0048] Information fields are:

1) Aggregated queue status: the field carries information about queue status in the PS without distinguishing among connections but cumulating information of all ATM connections that use dynamic bandwidth allocation in the PS. Static allocation connections are excluded. This status can be expressed by 1 or more bits.

2) Requested dynamic bandwidth, always less than minimum guaranteed bandwidth defined dur-

ing connection setup phase, expressed as instantaneous required minimum cell rate or **Minimum requested bandwidth** of the PS. This second information is optional and is computed by the PS on the basis of internal status (number of active connections of minimum guaranteed bandwidth type and related instantaneous traffic).

[0049] This information reaches MAC Master Processor with a certain minimum periodicity, determined by a proper programming of MAC Master Processor, as to guarantee fulfilment of all traffic parameters of active connections.

[0050] Request transport can take place with two different and coexistent modalities:

- 1) piggy-back in traffic slot - in the upstream slot transmission, the PS to which the slot is assigned, transmits a Request as well as user traffic;
- 2) mini-slot - in special upstream slot assigned through particular grants, one or more PSs transmit only a Request (plus physical layer preamble), usually using only a part of the entire slot, called mini-slot, for each transmission.

[0051] As already stated, MS hosts the MAC Master Processor, the block that implements MAC functionalities.

[0052] In Figure 2 functional interfaces of the MAC Master Processor block are shown.

[0053] From control/configuration interface traffic descriptors related to the combination of all the connections belonging to each traffic class of each PS are received.

[0054] From interface towards Transmission Convergence (TC) layer the following information is transferred:

- timing information and frame numbering (useful to generate retransmission grants)
- PSs' queue status information received through mini-slot or special field inside each upstream transmission burst.
- wrong burst reception notification: used in case of retransmission functionality is implemented.

[0055] MAC processor, using these inputs and performing MAC algorithm that is described forward, generates a Grant Stream made of a Grant for each upstream slot.

[0056] These Grants are transferred to TC block or functionality in order to be inserted in the proper position in downstream frame.

[0057] Insertion modality (grouped or one by one, error correcting or detecting code etc.) is not relevant to scope and functionality of the system in the present invention.

[0058] Bandwidth allocation is therefore performed

by the MAC Master Processor in the MS, through proper Grant generation in order to guarantee:

- static bandwidth assignment (meaning by static that it can be modified by command sent to MAC Master Processor, but non according to PS queue status) of a certain amount of bandwidth to each PS.
- dynamic assignment of bandwidth not assigned statically to priority connections. This allocation scheme can be influenced by PS queue status.
- ex-equo assignment of bandwidth not assigned with previous mechanism to all the PSs that have traffic in the queue.

[0059] Static allocation corresponds to the assignment of a fixed capacity, equal to a constant grant rate, to a certain PS, that is to a certain group of ATM connections with constant traffic profile in input to that PS.

[0060] Configuration information for static bandwidth allocation transits through proper maintenance and control interfaces and reaches MAC Master Processor control interface in the MS.

[0061] MAC Master Processor is not influenced by the status of the queue related to static allocation connections: for these connections no Request information carrying queue status is transmitted.

[0062] PS is informed about this static assignment in order to:

- identify ATM connections to insert in highest priority static queue.
- control user traffic through a correct policing functionality.

[0063] This information can reach PS through a dedicated operation and maintenance channel identified by a special VPI/VCI couple.

[0064] At the end of connection setup procedure, MAC Master processor starts generation of Grants related to those static connections.

[0065] Static allocation is usually applied to CBR traffic, but it can be used also for VBR real-time and, in principle, it can be applied to UBR traffic with clear inefficiencies.

[0066] Static modality must guarantee a continuous Grant generation stream, correspondent to a certain predetermined capacity to each requesting PS.

[0067] Each Master Processor is thus capable to generate up to M Grant streams in static modality, where M is the total number of PSs served by the same MAC Master Processor.

[0068] Grants needed to statically assign a certain constant capacity to a certain PS are inserted in a table in proper positions; the table is shown as a circular stripe in Figure 3 to indicate that the table is cyclically scanned.

[0069] The position inside the table is decided by an

algorithm whose task is to resolve conflicts if more than one PS have contemporary right to a certain slot assignment; the algorithm assigns subsequent and adjacent slot to the various PSs thus introducing a Cell Delay Variation which is acceptable because equivalent to that introduced by an ATM multiplexer.

[0070] Grants extracted from the table during cyclical scanning are transferred to the TC interface to be transmitted to the PSs.

[0071] Table dimension must be such as to obtain granularity and minimum allocation as requested by system specification.

[0072] Each position in the table corresponds to a slot and can contain:

- a static allocation user traffic Grant for a particular PS
- an Operation and Maintenance Grant for a particular PS
- a Grant for a group of minislots thus addressed to a group of PSs
- an available grant for dynamic allocation (free position)

[0073] Dynamic allocation is mainly used for traffic with variable traffic profile.

[0074] In Figure 3 MAC Master Processor functional scheme that implements static/dynamic Grant generation is shown according to present invention.

[0075] Functional blocks in Figure 3 are:

[0076] A *Priority Scheduler*, that selects the right FIFO from which Grant must be extracted in each slot choosing on the basis of FIFO status and priority. Static traffic is the highest priority.

[0077] As many *Grant Managers* as the number of handled priorities.

[0078] Slots that aren't assigned statically are dynamically assigned to other traffic types. In the Figure three priorities are shown.

[0079] Grant Manager function is repeated for each priority; only one priority will be therefore described in the following.

[0080] *Request Processor & Queue Status Mirror* elaborates Requests sent by PSs for that traffic priority, rebuilding in dedicated registers the mirrored queue status related to each PS.

[0081] When the mirrored status indicates the queue of a PS is not empty, a 'Pending request' information related to that PS is active inside the MAC Master Processor.

[0082] 'Pending request' can't be served until a down-counter associated to that priority of that PS has expired.

[0083] This constraint realises an automatic flux control on the upstream traffic in the system.

[0084] The starting value of the down-counter is such as to generate a grant rate equal to the sum of all the guaranteed rates of all the connections in the PS.

[0085] At the beginning the starting value of the counters is chosen at connection setup.

[0086] During normal operation, with a frequency determined by the MAC Master Processor, the PS, according to its instantaneous state sends a precise request of "Minimum requested bandwidth", which is the new starting value for the correspondent counter in the MAC Master Processor; upon reception of the new Request, MS modifies counter starting value with the new requested value (MS must check that requested value is greater than the value identified during connection setup, that means that PS can only release part of the "Minimum Bandwidth" assigned at the beginning during connection setup phase and not increase that bandwidth); if current counter value is greater than new starting value, current value is set equal to new starting point.

[0087] All counters in MS are decremented at each upstream slot time. When a counter after downcounting from starting point to zero, expires, it is re-set to starting point and a binary information called 'Expired Counter' associated to related PS is set to 1.

[0088] Activation of both 'Expired Counter' and 'Pending Request' at the same time for a particular PS corresponds to the activation of a 'Pending Grant' information associated to that PS.

[0089] Another process scans all the Pending Grants at each slot time and inserts in the Grant FIFO a Grant of user traffic type with the identification number of the related PS for each PS that has an active Pending Grant. At the same time the process sets to 0 the 'Expired Counter' information.

[0090] Grants are extracted from the FIFO one for each slot that is not reserved to higher priority traffics.

[0091] If the counter expires when 'Pending Request' is not active, the counter is re-set to starting value and then it resumes counting, while 'Expired Counter' is set and stays at 1, so that eventual later activation of Pending Request will immediately cause Pending Grant activation.

[0092] Counter structure can be used to realise more sophisticated flux control functions, simply varying according to more or less complicated algorithms modality of increment and decrement of the counter itself.

[0093] Bandwidth not assigned according to previously described mechanisms (that is when, on Grant generation time, no Pending Grant is active and no static assignment is preallocated) is distributed in equal shares to all the PSs that have at least one cell in queue in any connection which is handled by the dynamic modality (statically handled connections are therefore excluded) and therefore related Grants are assigned cyclically to all the PSs that have an active 'Pending Request'.

[0094] If no PS has cells to be transmitted, bandwidth is used to allow sending of additional "minislots", that is the Grant is assigned to a slot period to be used

to send minislots when no Pending Request, no Pending Grant and no static allocation Grant are present at a certain slot time.

[0095] Minislot grants are assigned cyclically to all the PSs in the system.

[0096] In Figure 4 PS MAC Processor interfaces towards other UP functionalities are shown.

[0097] Through interface to Transmission Convergence (TC), the functionality that provides insertion of MAC messages and user data in the packet or frame to be transmitted on the physical channel and extraction of the same information in the reception side, MAC Slave Processor receives the following information:

- timing of transmission slots
- Grants

[0098] Through interface toward ATM functionalities MAC Slave Processor receives the following information:

- queue status information

[0099] MAC Slave Processor produces as an output towards TC:

- transmission activation commands in determined upstream slots or minislots
- indication of the type of information to be served in correspondence of each activation command (user traffic, maintenance or mini-slot): user traffic queues associated to different classes of traffic or different connections are assumed to be part of ATM layer which is also responsible for the choice of the queue to be served at each transmission activation command.
- Request messages to be inserted in upstream slots and mini-slots with the correct timing when proper activation commands are activated.

[0100] Retransmission functionality can be useful in some conditions and therefore can be optionally added to the MAC system of the invention.

[0101] As an example, it is here described a retransmission technique that can be optionally applied to only upstream traffic (the most sensitive to physical channel problems) in the system of the invention.

[0102] Considered retransmission technique will handle all the classes of traffic in the same manner.

[0103] As well as MAC messages and their contents, that have been previously described, special messages can be defined to implement retransmission: a "retransmission grant" will be added to grant types as well as user traffic, mini-slot and operation and maintenance traffic grant type.

[0104] A new downstream message is defined and named "reception acknowledge"; it is inserted in a dedicated field of each downstream slot and carries information

on right or wrong reception of the upstream burst that has been transmitted in the upstream slot that immediately precedes the downstream slot in which the acknowledge is inserted.

[0105] Acknowledge implicitly carries information on the position of the wrong slot.

[0106] Support of retransmission functionality mustn't degrade unacceptably performance of normal traffic and therefore when a cell loss occurs, it must be avoided that:

- normal traffic is delayed until retransmission of lost traffic has taken place
- cell sequence integrity is lost in the MS.

[0107] To comply with these requirements, a reordering buffer is included in the MS; the buffer is made of M locations each capable of storing an entire cell.

[0108] Buffer is traversed by all the cells receive by MS TC, before they are transferred to other (usually ATM) functionality in the MS. In this manner a constant delay of M cells is introduced on all the upstream connections.

[0109] M is chosen so that:

- up to K consequent cells can be retransmitted (lower bound);
- an unacceptable delay isn't introduced and a too large memory isn't required (upper bound).

[0110] When up to K consequent cells are lost, K free positions are left in the reordering buffer; these positions will shift of a place at each slot time towards the end of the buffer.

[0111] When a retransmitted cell is received, it is directly inserted in the empty position, passing over all the positions nearer to buffer input.

[0112] K consequent cells retransmission doesn't necessarily take place in a single burst of the same length: the single burst would inevitably cause a potentially unacceptable distortion of other traffics (CBR in particular).

[0113] It is therefore advisable that K retransmission grants are generated with proper spacing: a grant scheduler handled with maximum priority will be therefore associated to retransmission traffic.

[0114] In this way a spacing of J slots between any two retransmission grants will cause the retransmission of K cells to take place in K\*J slots.

[0115] Reordering buffer shall be dimensioned in  $M_{\max}$  cell positions in order to allow reconstruction when up to K consequent cells are lost where:

$$M_{\max} = K \cdot (J-1) + T_{\text{Round Trip Max}} / T_{\text{Slot}}$$

without considering elaboration times.

[0116] The functional behaviour is traced in Figure 5.



[0117] When more than K consequent cells are lost, all the cells after the  $K^{\text{th}}$  cannot be retransmitted (cannot be received in time for reordering).

[0118] As MS is able to verify age and thus usefulness of retransmission grants, it's advisable to insert a check through a dedicated block (Age check block in Figure 6) so that in case of excessive age grant won't be transmitted to the PS.

[0119] PS must have a FIFO buffer of the same dimension, in which transmitted cells are stored and shifted at each upstream slot time (if the slot is assigned to a different PS an idle cell is inserted). When a retransmission is requested the PS gets the requested cell from the buffer and sends it over.

#### Claims

1. Method to assign bandwidth in a point-to-multipoint ATM transmission system having a centralized or Master Station (MS) and a plurality of Peripheral Stations (PSs), in particular to assign bandwidth on the transmission channel from Peripheral Stations (PSs) to the Master Station (MS) assigning time slots through emission of messages called Grants by the Master Station (MS) towards the Peripheral Stations (PSs), the method being organised so that it can preallocate a certain portion of total bandwidth in static modality to various Peripheral Stations (PSs) on the basis of information about active connections but without considering the status of the queues in the various Peripheral Stations (PSs), characterised by the fact that the Master Station (MS) is structured in a way that allows elaboration of instantaneous bandwidth requirement information or "Requests" sent by Peripheral Stations (PSs) to the Master Station (MS) and distributes bandwidth not assigned with previous static technique according to two additional modalities together defined dynamic bandwidth allocation mode and explicitly described in the following,

- the first additional modality is defined guaranteed dynamical bandwidth and is characterised by a rate of assignment of transmission allocation or Grants that is prefixed but is real time modifiable according to instantaneous bandwidth requirements notified by each Peripheral Station (PS), in a way that a minimum guaranteed bandwidth defined during connection setup phase is always assigned when requested with precise notification.
- the second additional modality is called available dynamic bandwidth and assigns bandwidth which is not assigned by the previous techniques sharing it in equal parts among all the Peripheral Stations (PSs) that signal to the Master Station (MS) the need to use the channel from the Peripheral Stations (PSs) to the

Master Stations (MS) to send traffic.

2. Method of claim 1, characterised by the fact that the Request that is generated by each Peripheral Station (PS) contains a binary information (empty/not empty) or a multi-bit information (level of fillment) identifying queue status in the Peripheral Station (PS) for those queues that are handled by dynamical allocation scheme; said Request containing, as well or instead, an information representing instantaneous rate of Grants generation for guaranteed dynamic bandwidth, rate that is limited by a maximum value that depends on active connections and is known both in the Master Station (MS) and in the Peripheral Station (PS).
3. Method of claim 2, where such instantaneous rate is estimated on the basis of incoming rate of ATM cells in the Peripheral Station (PS).
4. Method of claim 2, where such instantaneous rate is estimated on the basis of Peripheral Station (PS) queue fillment level.
5. Method of claim 1, where said Grants allow transmission of one particular Peripheral Station (PS) in one particular time slot on the channel from Peripheral Stations (PSs) to Master Station (MS), so that the Peripheral Station (PS) can send a user traffic cell with associated Request or a Request only or an operation and maintenance cell.
6. Method of claim 5 where said Grants address the Peripheral Stations (PSs) without any distinction related to the type of bandwidth allocation (static, guaranteed dynamic or available dynamic) with which they have been generated in the Master Station (MS) and the Peripheral Station (PS) includes means to choose the queue to be served in correspondence of each Grant that activates its transmission, on the basis of defined priorities and totally autonomously.
7. Method of claim 1, characterised by the fact that preallocated bandwidth is assigned with a fixed rate that is computed on the basis of ATM connection status, using a stored table that is cyclically scanned in the Master Station (MS).
8. Method of claim 1, characterised by the fact that bandwidth assignment mechanism for dynamic traffic is realised on more than one level, all equals and independent from each other, each dedicated to a specific priority level to be used with different classes of traffic.
9. Method of claim 1, characterised by the fact that guaranteed dynamic bandwidth is assigned only to

those Peripheral Stations (PSs) that have sent a Request indicating that their queues are not empty and with a rate requested by Peripheral Station (PS) itself within a maximum amount that is negotiated by the Master Station (MS) and the Peripheral Station (PS) during ATM connection setup phase.

10. Method of claim 1, characterised by the fact that available dynamic bandwidth is assigned cyclically and thus in equal parts to all the Peripheral Stations (PSs) that have indicated in a previous Request that their queues are not empty.
11. Method of claim 1, characterised by a retransmission mechanism applicable only to the traffic from Peripheral Stations (PSs) to the Master Station (MS) and realised through acknowledge messages that identify wrongly received cells and proper Retransmission Grants sent to Peripheral Stations (PSs) that had sent incorrectly received cells.
12. Method of claim 11, characterised by the use of a reordering buffer in the Master Station (MS) to reinsert retransmitted cells in the correct order and a retransmission buffer in each Peripheral Station (PS) to store transmitted cells waiting for an eventual retransmission.
13. System to assign bandwidth in a point-to-multipoint ATM transmission system having a centralized or Master Station (MS) and a plurality of Peripheral Stations (PSs), in particular to assign bandwidth on the transmission channel from Peripheral Stations (PSs) to Master Station (MS) assigning time slots through emission of messages called Grants by the Master Station (MS) towards the Peripheral Stations (PSs), the system comprising means to preallocate a certain portion of total bandwidth in static modality to various Peripheral Station (PSs) on the basis of information about active connections but without considering the status of the queues in the various Peripheral Stations (PSs),  
characterised by the fact that the Master Station (MS) includes additional means that allow elaboration of instantaneous bandwidth requirement information or "Requests" sent by Peripheral Stations (PSs) to Master Station (MS) and that allow distribution of bandwidth not assigned with previous static technique according to two additional modalities together defined dynamic bandwidth allocation mode and explicitly described in the following,
  - the first additional modality is defined guaranteed dynamical bandwidth and said additional means are structured in a way to generate a rate of assignment of Grants that is prefixed but is real time modifiable according to instantaneous bandwidth requirements notified by each

Peripheral Station (PS), so that a minimum guaranteed bandwidth defined during connection setup phase is always assigned when requested with precise notification.

- the second additional modality is called available dynamic bandwidth and said additional means are structured in a way that allow assignment of bandwidth which is not assigned by the previous techniques by sharing it in equal parts among all the Peripheral Stations (PSs) that signal to the Master Station (MS) the need to use the channel from Peripheral Stations (PSs) to the Master Station (MS) to send traffic.
14. System of claim 13, characterised by the fact that the Peripheral Stations (PSs) comprise means to generate a Request information to be sent to the Master Station (MS) upon request by the Master Station (MS) itself and containing a binary information (empty/not empty) or a multi-bit information (level of fillment) identifying queue status in the Peripheral Station (PS) for those queues that are handled by dynamical allocation scheme; Request containing, as well or instead, an information representing instantaneous rate of Grant generation for guaranteed dynamic bandwidth, rate that is limited by a maximum value that depends on active connections and is known both in the Master Station (MS) and in the Peripheral Station (PS).
  15. System of claims 12 and 13, characterised by the fact that means to assign guaranteed dynamic bandwidth comprise:
    - counting means that is a block of down-counters, one for each Peripheral Station (PS) that is handled by the Master Station (MS), that are preset to a starting value when new connections are activated and are decremented at each time of a slot on the channel from Peripheral Station (PS) to Master Station (MS), being reset to starting value after having reached the 0 value;
    - decoding means that activate an output when a counter reaches the 0 value;
    - memory means to store queue status sent by the Peripheral Stations (PSs);
    - checking means that activate an output when decoding means associated to a particular Peripheral Station (PS) are activated and queue status of the same Peripheral Station (PS) is not empty and are able to generate a transmission grant to the Peripheral Station (PS) when the conditions are met.
  16. System as of claim 15, characterised by the fact that the Master Station (MS) comprises means able

to temporarily increment starting value of the down-counter of a particular Peripheral Station (PS) on the basis of precise indications received by the Peripheral Station (PS) itself as a Request.

17. System as of claim 15, characterised by the fact that said counting means, decoding means, memory means and checking means are in a number equal to traffic priorities that the system must be able to handle.

5

10

15

20

25

30

35

40

45

50

55

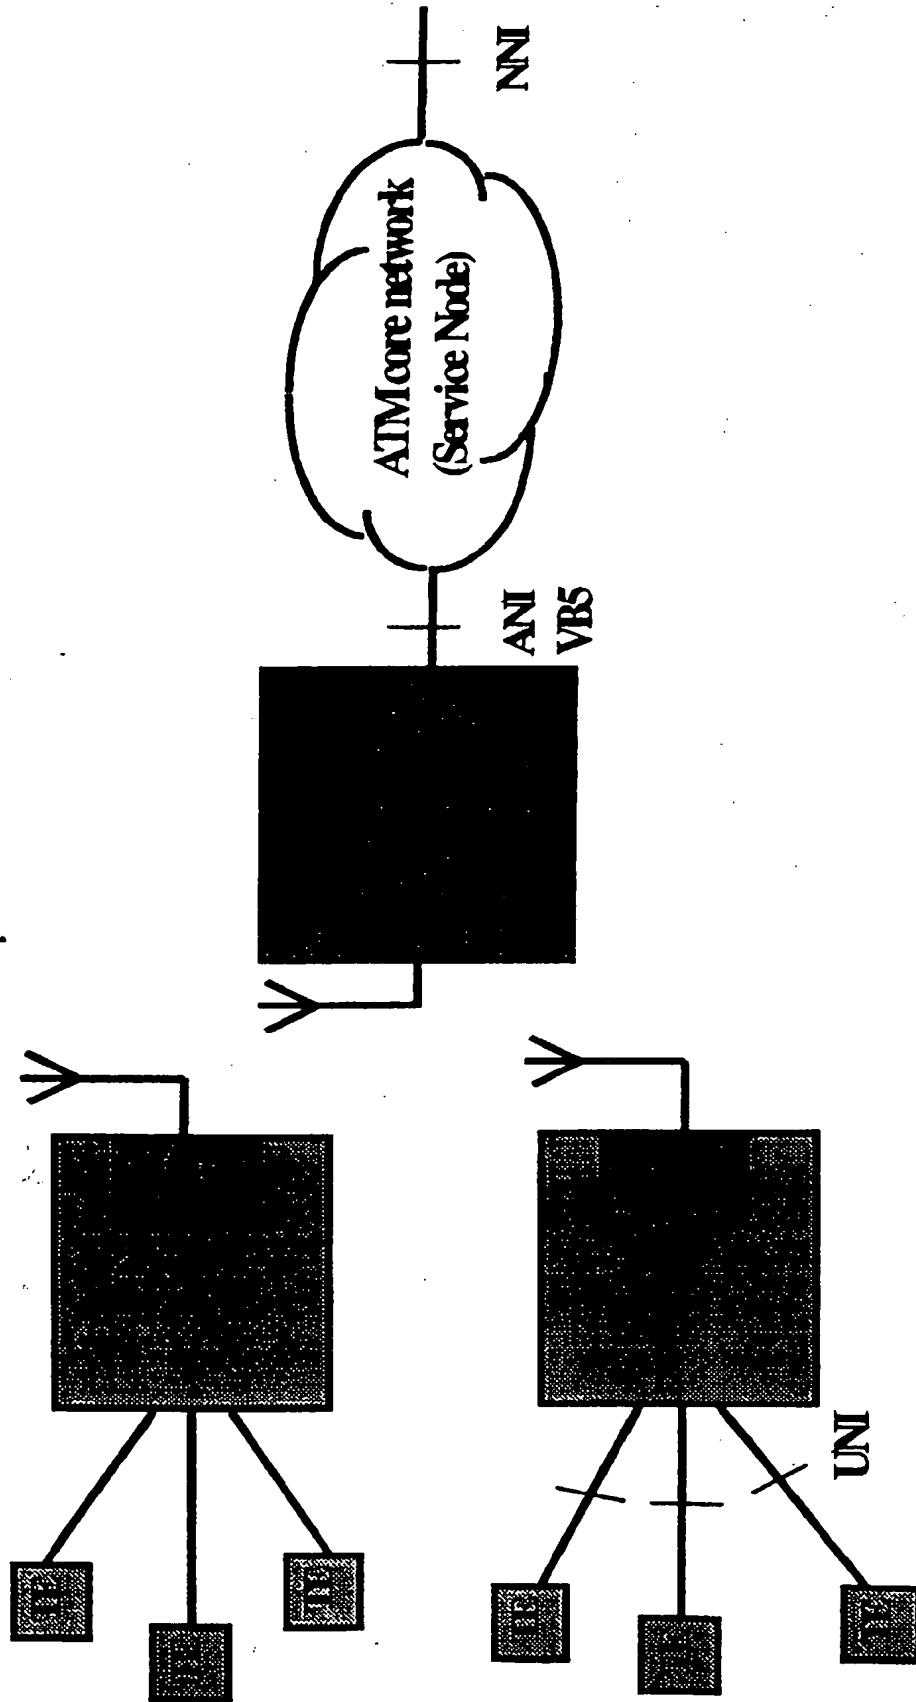
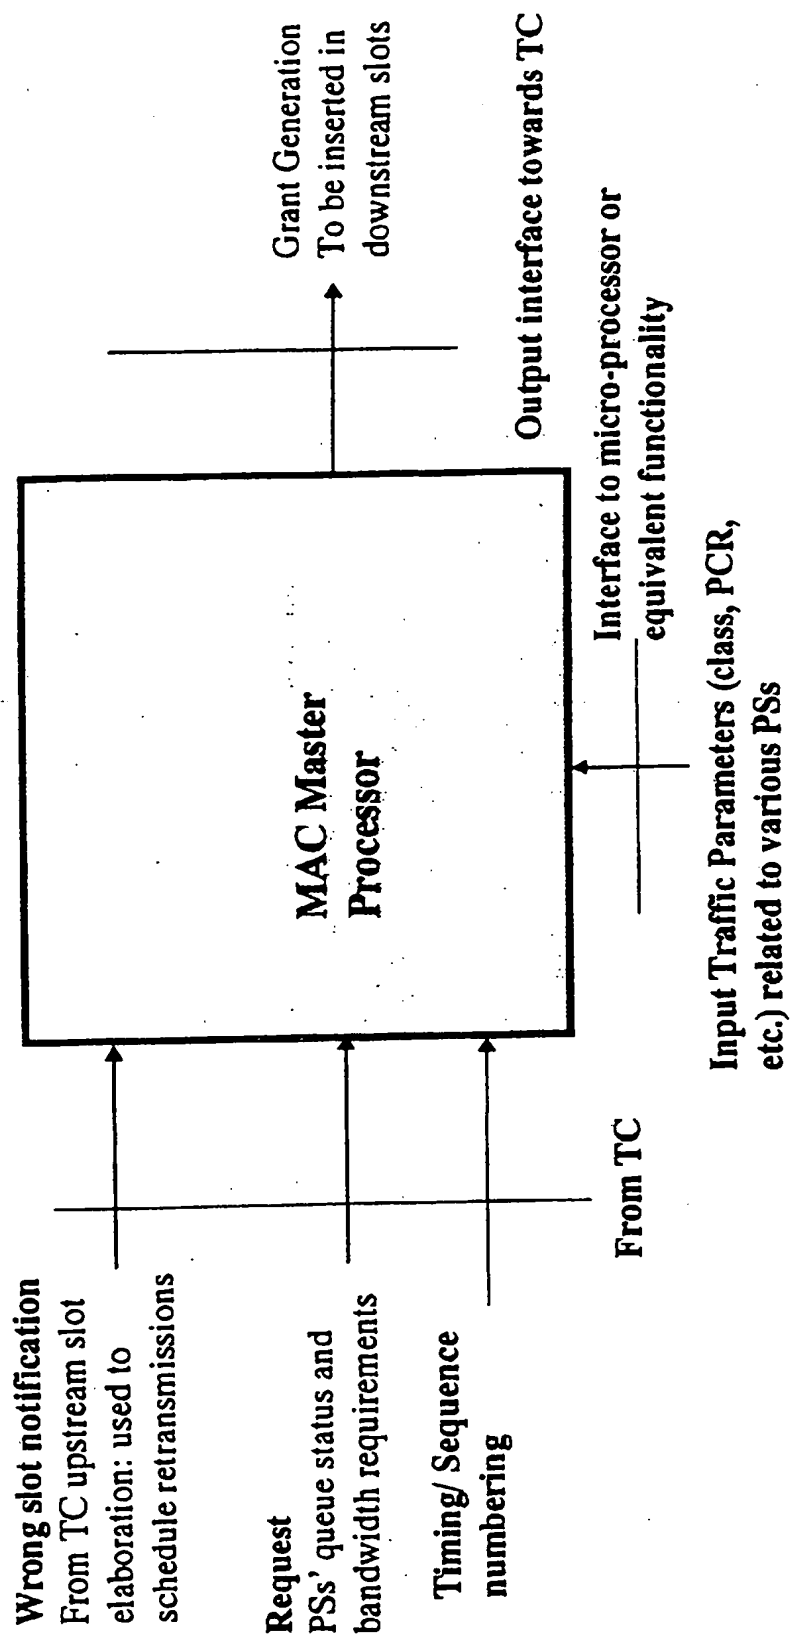


Fig. 1

**Fig. 2**

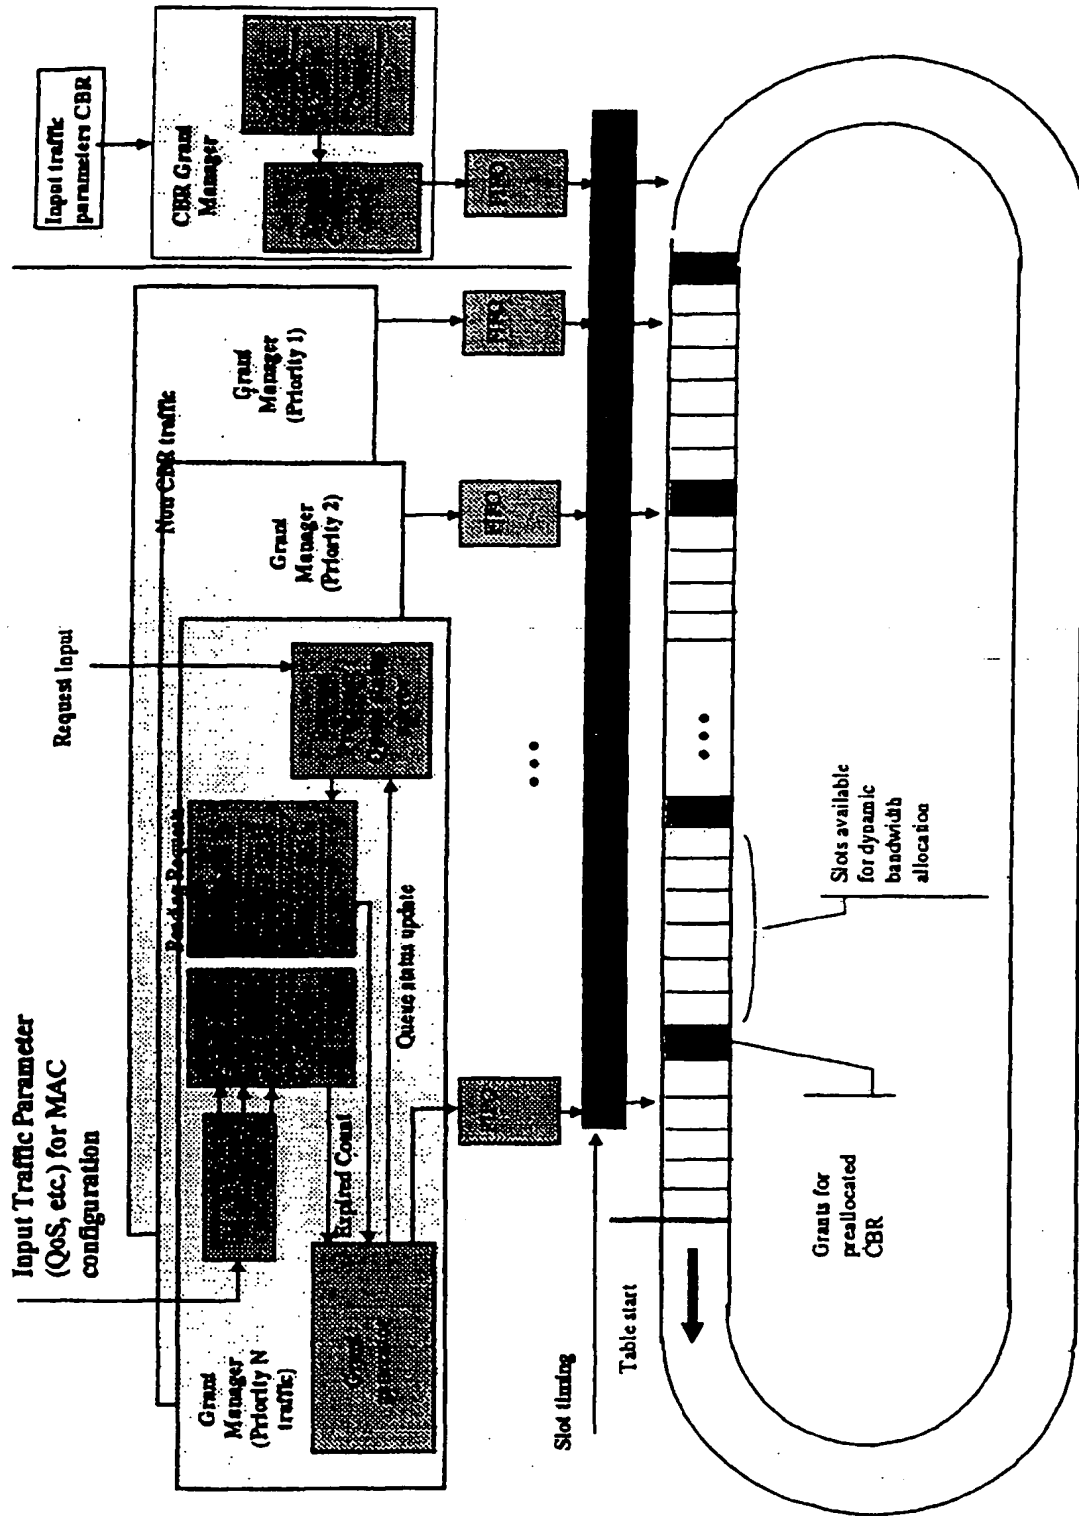
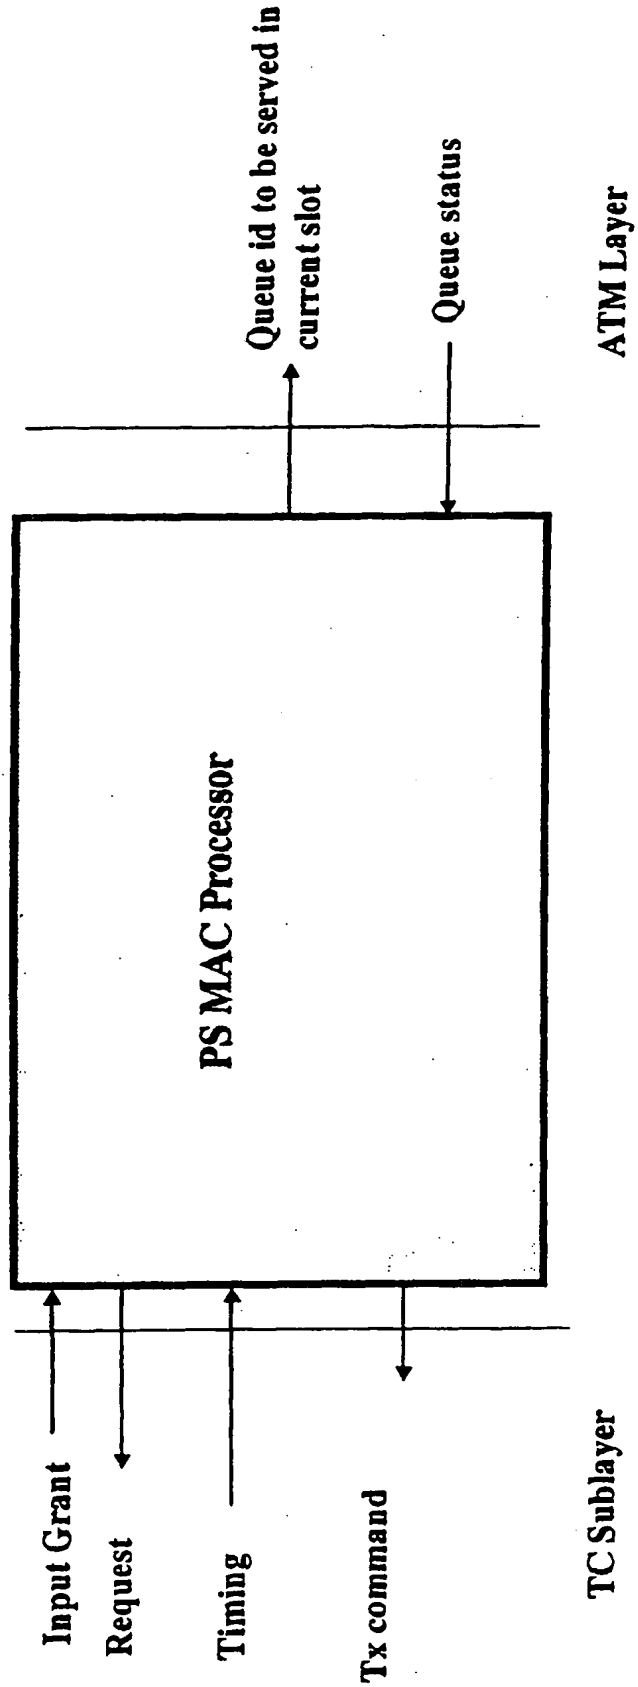


Fig. 3



**Fig. 4**

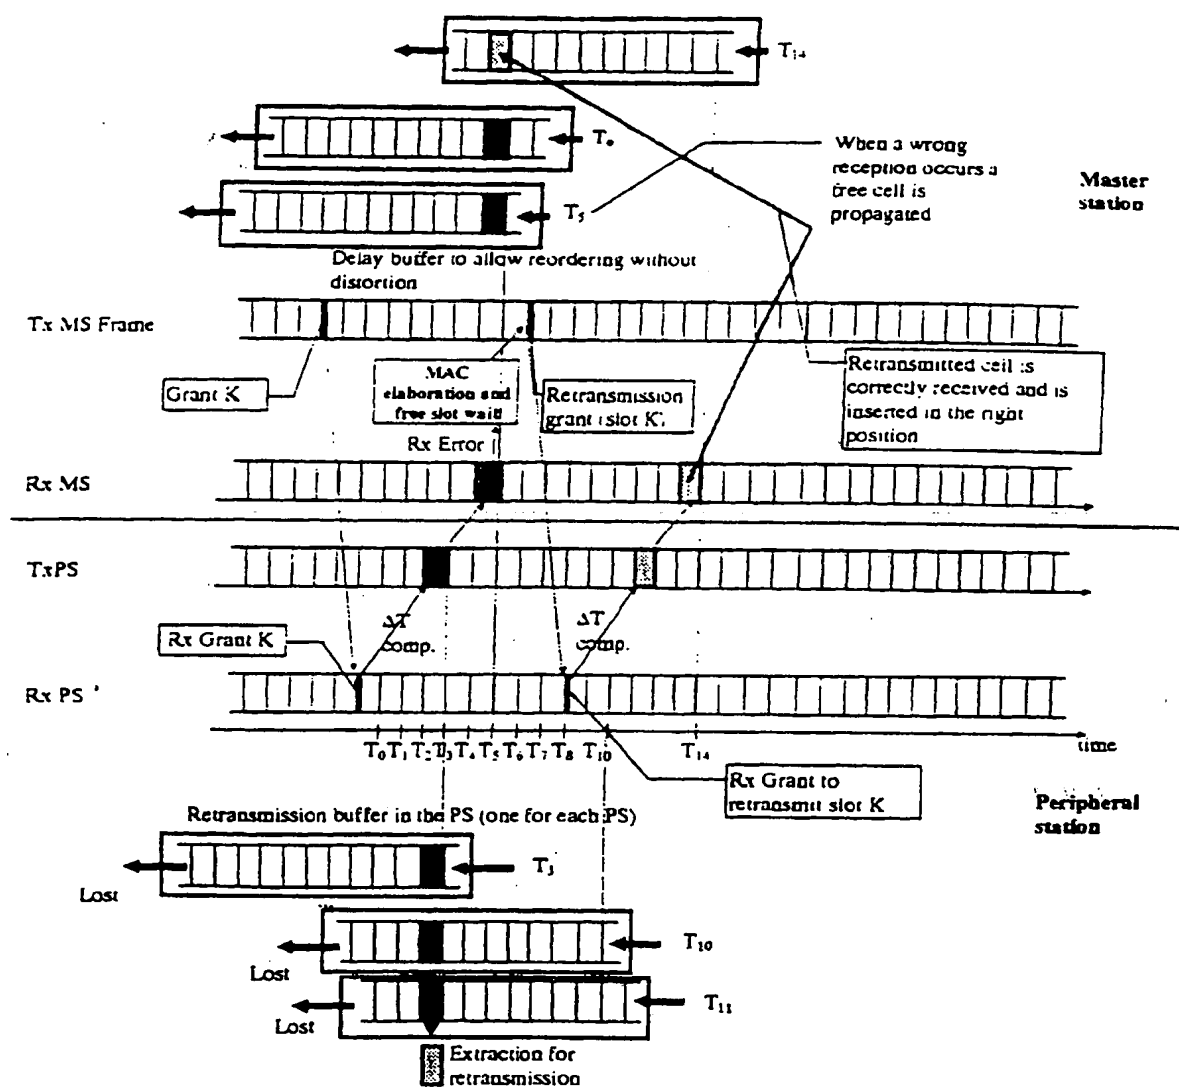


Fig. 5



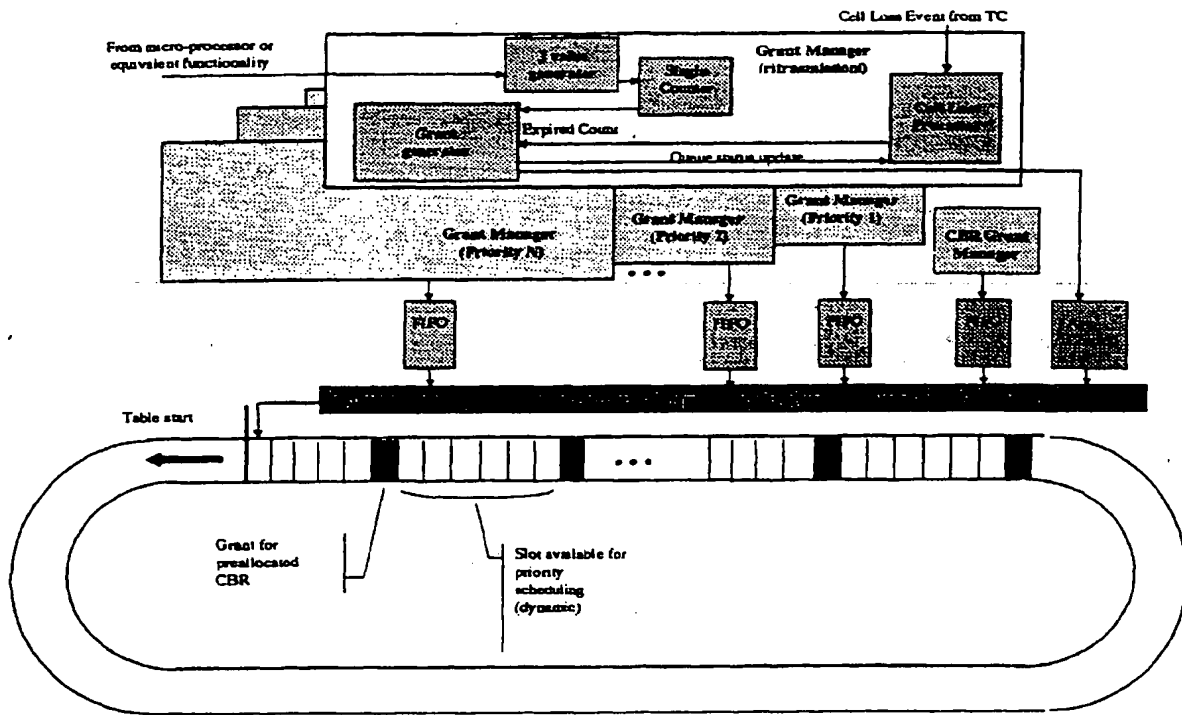


Fig. 6

European Patent  
Office

## EUROPEAN SEARCH REPORT

Application Number  
EP 98 83 0788

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. CL.5)
X	WO 97 35410 A (GEN INSTRUMENT CORP ; HOU VICTOR T (US); FELLOWS JONATHAN A (US)) 25 September 1997	1,7-10, 13	H04Q11/04
Y	* page 20, line 1 - page 21, line 23 * * page 23, line 1 - page 30, line 23 *	2,3,5, 11,12,14	
Y	WINSTANLEY S B ET AL: "Permit delivery rates of an ATM cell based access network MAC protocol" IEE ELEVENTH UK TELETRAFFIC SYMPOSIUM. PERFORMANCE ENGINEERING IN TELECOMMUNICATIONS NETWORKS, IEE ELEVENTH UK TELETRAFFIC SYMPOSIUM. PERFORMANCE ENGINEERING IN TELECOMMUNICATION NETWORKS, CAMBRIDGE, UK, 23-25 MARCH 1994, pages 8A/1-9, XP002104951 1994, London, UK, IEE, UK * page 1, line 1 - line 38 * * page 2, line 15 - line 50 *	2,3,5,14	
Y	US 5 684 791 A (RAYCHAUDHURI DIPANKAR ET AL) 4 November 1997 * column 12, line 25 - line 67 *	11,12	TECHNICAL FIELDS SEARCHED (Int. CL.5) H04Q
A	EP 0 804 006 A (IBM) 29 October 1997 * page 5, line 45 - page 6, line 3 * * page 7, line 11 - page 8, line 16 *	1-17	
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 4 June 1999	Examiner Gregori, S
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1500 03/92 (P04021)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 98 83 0788

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

04-06-1999

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 9735410	A	25-09-1997	AU 2329197 A	10-10-1997
			EP 0888679 A	07-01-1999
			NZ 331915 A	28-05-1999
US 5684791	A	04-11-1997	NONE	
EP 0804006	A	29-10-1997	JP 10070554 A	10-03-1998

EPO FORM P0409

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82